

Data sheet

Climatic Chamber with Phytotron System

KK 750 FIT P Smart PRO



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Advantages of the SMART PRO controller:

- large (7"), clear, full colour touch screen
- LAN, USB ports and WiFi for communication and data transfer
- multi-segment time and temperature programs
- overview of data in tabular and graphic form
- visual and sound alarm
- Admin function for management
- password protected log-in
 internal memory for programs and data storage
- event registry with user notifications
- LabDesk software and user manual for direct download




Smart PRO - preview screen





A. POLOK – KOWALSKA, S. KOWALSKI 44-300 WODZISŁAW ŚLĄSKI, UL. KOKOSZYCKA 172 C

TECHNICAL DATA		
air convection	forced	
chamber capacity [l]	749	
working capacity [l]	698	
controller	microprocessor PID	
display	7" full colour touch screen	
TEMPERATURE AND HUMIDITY		
temperature range [°C]	0+60 (with light on +10+50)	
temperature resolution every [°C]		
temperature resolution every [C]	0,1	
temperature variation at 25°C and 60%rH [+/-°C]*	2,0	
temperature variation at 25°C and 60%rH [+/-°C]*	2,0	
temperature variation at 25°C and 60%rH [+/-°C]* relative humidity range [%]	2,0 3090 (see chart for details)	




tel. (+48) 32 453 91 70

obszar pracy krótkotrwałej (max.24 h) short-term work area (max. 24h)

Wilgotność względna / Relative humidity [%]

CHAMBER	
door	double (external solid, internal glass) / external glass (option)
interior	
Smart PRO	acid-proof stainless steel to DIN 1.4301
IG Smart PRO	acid-proof stainless steel to DIN 1.4301
housing	
Smart PRO	powder coated sheet
IG Smart PRO	stainless steel linen finish








overall dims [mm] /1/	
A width	1260
B height	2000
depth C	1140
internal dims [mm]	
width D	1040
height E	1200
depth F	600

tel. (+48) 32 453 91 70

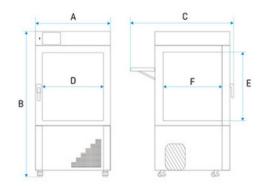

- reinforced shelf version (PW) [kg] /3/ 100 max unit workload [kg] 140 weight [kg] 275	shelves (standard max)	5 16
	- reinforced shelf version (PW) [kg] /3/	100
weight [kg] 275	max unit workload [kg]	140
	weight [kg]	275

ELECTRICAL PARAMETERS	
power supply	230V 50-60Hz
nominal power [W]	3350
refrigerant	R290 / GWP=3
warranty	24 months
manufacturer	POL-EKO-APARATURA

all the above technical data refer to standard units (without optional accessories)

- * variation (K) calculated for chamber as: K= +/- (T average max. T average min.) / 2
- $\ensuremath{^{\star\star}}$ other power supplies on request
- 1 depth doesn't include 50 mm of power cable
- 2 on uniformly loaded surface
- 3 reinforced shelf
- 4 reinforced version

OPTIONS AND ACCESSORIES



Order number: */A

Door with viewing window



Order number: */P INOX

Stainless steel wire shelf INOX



Order number: */PP

Perforated shelf




Order number: */PW

Reinforced shelf





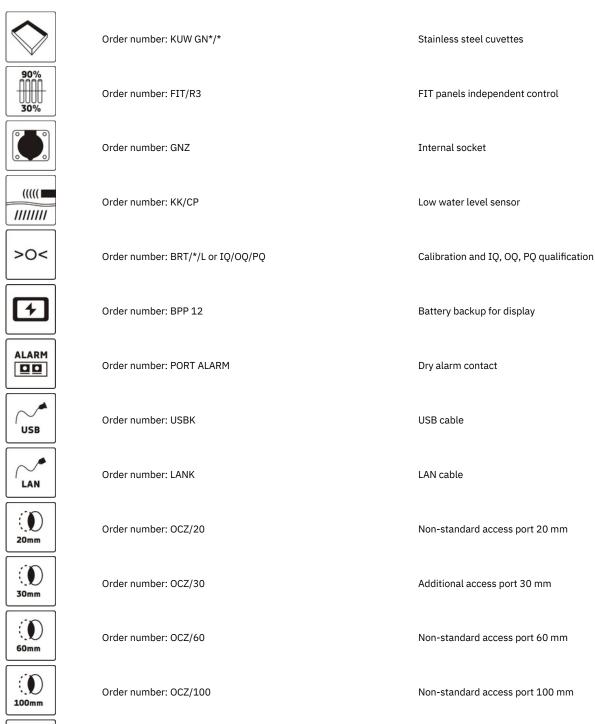



Order number: KK/Z

Order number: KK/Z



Container for deionised water





Want to know more?

If you have questions about this item, please give us a call on 01257 270 433.

Richmond Scientific are a family run business in Lancashire. We're a small team, and we're always just a phone call away. With over 30 years in the business there's not much we haven't seen before, and we're always happy to chat.

Have kit to sell?

Call us on 01257 270 433 Email: harry@richmondscientific.com Visit: www.richmondscientific.com

Visit Website Sell used kit Our newsletter