

Data sheet


CO₂Incubator ILC 180 Smart PRO



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Advantages of the SMART PRO controller:

- large (7"), clear, full colour touch screen
- LAN, USB ports and WiFi for communication and data transfer
- multi-segment time and temperature programs
- overview of data in tabular and graphic form
- visual and sound alarm
- Admin function for management
- password protected log-in
- internal memory for programs and data storage
- event registry with user notifications
- LabDesk software and user manual for direct download

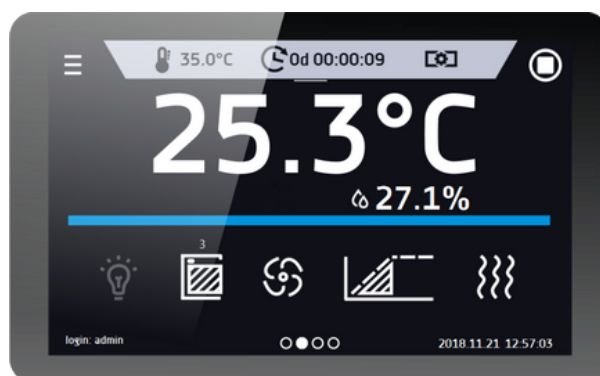

Smart PRO - preview screen

TECHNICAL DATA

air convection	natural (without fan)
chamber capacity [l]	182
working capacity [l]	135 /3/
controller	microprocessor PID
display	7" full colour touch screen

TEMPERATURE

temperature range [°C]	5°C above ambient temperature ... +50°C
temperature resolution every ... [°C]	0,1
temperature fluctuation at 37°C [±-°C]*	0,1
temperature variation at 37°C [±-°C]*	0,3
Temperature recovery time after 30 seconds door opening at 37°C [min]	6
over temperature protection	class 3.1 to DIN 12880

CO2


CO2 range [%]	0-20
CO2 resolution every ... [%]	0,1
CO2 measurement	IR
CO2 recovery time after 30 seconds door opening at 5 Vol.-% CO2 [min]	10
relative humidity range [%]	90-95

CHAMBER

door type	double (external solid, internal glass)
interior	
Smart PRO	acid-proof stainless steel to DIN 1.4301
housing	
Smart PRO	powder coated sheet

overall dims [mm] /1/

width A	70
height B	0
depth C	92
internal dims [mm]	0
width D	58
height E	0
depth F	65
	0
	50
	0

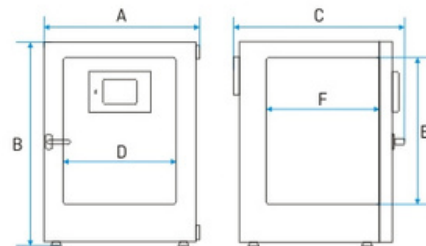

shelves (standard max)	3 / 6
max shelf workload [kg] /2/	10
max unit workload [kg]	30
weight [kg]	96

ELECTRICAL PARAMETERS

Energy consumption at 37°C [Wh/h]	66
voltage**	230V 50-60Hz
nominal power [W]	1700
Noise level [db(A)]	42
warranty	24 months
manufacturer	POL-EKO-APARATURA

all the above technical data refer to standard units (without optional accessories)

* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:

$K = \pm (T \text{ average max.} - T \text{ average min.}) / 2$

** - other power supplies on request

1 - depth doesn't include 50 mm of power cable

2 - on uniformly loaded surface


3 - doesn't include rack for shelves

OPTIONS AND ACCESSORIES



Order number: */PP

Perforated shelf




Order number: BRT*/L or IQ/OQ/PQ

Calibration and IQ, OQ, PQ qualification




Order number: */PPW

Reinforced perforated shelf




Order number: */AD

Stacking adaptor



Order number: */STN

Base on castors



Order number: */STW

Support frame on castors



Want to know more?

If you have questions about this item, please give us a call on 01257 270 433.

Richmond Scientific are a family run business in Lancashire. We're a small team, and we're always just a phone call away. With over 30 years in the business there's not much we haven't seen before, and we're always happy to chat.

Have kit to sell?

Call us on 01257 270 433

Email: harry@richmondscientific.com

Visit: www.richmondscientific.com

[Visit Website](#)

[Sell used kit](#)

[Our newsletter](#)