

# LANCER

810 LX / 815LX  
USER MANUAL



ORIGINAL INSTRUCTIONS

## PRECAUTIONS TO BE TAKEN BEFORE USE

- Users must be trained before using the washer.
- The staff that use or repair this washer must have followed a complete training referring its use and maintenance. This training must include the selection and understanding of the washing cycle, the loading and unloading of the baskets and the handling of the washing products.
- The staff in contact with the detergent products and its emanations, which could be used in this washer-dryer, must have knowledge of the safety data sheet of the used products as well as the detailed instructions about the dangers and the detection of toxic product leaks.
- The training of the users and technicians must be done regularly and always before the first use of the washer. A written register of these trainings must be kept in order to prove the presence and the understanding of the interested parties.



---

# SUMMARY

<b>CHAPTER 1 INTRODUCTION.....</b>	<b>9</b>
1. COPYRIGHT – LIABILITY	10
2. MANUFACTURER	10
3. 810 LX / 815 LX RANGE	10
4. USER MANUAL	11
<b>CHAPTER 2 BEFORE YOU START .....</b>	<b>13</b>
1. SAFETY ADVICES	14
1.1 PRECAUTIONS FOR USE	14
1.2 USE	15
2. OPENING THE WASHER’S DOOR	16
3. MAXIMUM CHARGE	16
4. WASHING PRODUCTS	17
4.1 WASHING PRODUCTS CATEGORIES	17
4.2 INSTRUCTIONS TO RESPECT IN CASE OF HANDLING THE WASHING PRODUCTS	17
4.3 INSTRUCTIONS TO RESPECT IN CASE OF CHANGING THE PRODUCT FORMULA	18
4.4 CHANGE OF THE TANKS	18
5. EXTERNAL PRINTER (OPTION)	19
5.1 CHECKING THE PRINTER	19
5.2 CHOICE OF THE SUITABLE PAPER ROLLS	19
5.3 REMOVING PAPER AND CLEARING PAPER JAMS	19
5.4 LOADING PAPER	19
5.5 OPERATING MODES	19
5.6 PRINTER MAINTENANCE	19
5.7 NOTE PRINTING	20
6. USING OF THE ACCESSORIES	21

---

6.1	SOME EXAMPLES	21
6.2	FITTING THE BASKETS	23
<b>CHAPTER 3</b>	<b>WASHING CYCLE LAUNCHING.....</b>	<b>25</b>
<b>1.</b>	<b>DESCRIPTION AND BASIC FUNCTIONS OF KEYPAD</b>	<b>26</b>
<b>2.</b>	<b>LAUNCHING OF A CYCLE</b>	<b>27</b>
2.1	SWITCHING ON	27
2.2	CYCLES	27
2.3	LAUNCHING THE CYCLE	29
2.4	INFORMATION AVAILABLE DURING THE WASH CYCLE	30
<b>3.</b>	<b>END OF CYCLE</b>	<b>31</b>
3.1	OPENING OF THE DOORS	31
3.2	OPENING	31
3.3	REPRINTING OF THE TICKET	32
3.4	SWITCHING OFF	32
<b>4.</b>	<b>ACCESS TO USER MENU</b>	<b>33</b>
4.1	MODIFYING THE WASHING CYCLES	34
4.2	SEQUENCES READING OF ONE WASHING CYCLE	40
4.3	DOSING PUMP PRIMING	41
4.4	NAME CHOICE OF ONE WASHING CYCLE	42
4.5	THE CHOICE OF MACHINE NAME	43
4.6	READING OF CYCLE FAULTS	44
4.7	PRINTER PARAMETERS (OPTION)	45
4.8	RETURN TO THE INITIAL STATE	45
<b>5.</b>	<b>TABLE OF FACTORY-PROGRAMMED CYCLES – 810 LX</b>	<b>46</b>
<b>6.</b>	<b>TABLE OF FACTORY-PROGRAMMED CYCLES – 810 LX – SUPPLY VOLTAGE 120V MONO / 60HZ</b>	<b>47</b>
<b>7.</b>	<b>TABLE OF FACTORY-PROGRAMMED CYCLES - 815LX</b>	<b>48</b>

---

8. TABLE OF FACTORY-PROGRAMMED CYCLES - 815LX – SUPPLY VOLTAGE 120V MONO / 60HZ	49
9. USER CYCLE PROGRAMMING TABLE	50
<b>CHAPTER 4 TRACEABILITY.....</b>	<b>51</b>
1. EXTERNAL PRINTER (OPTION)	52
2. THE PRO KIT (OPTION)	53
<b>CHAPTER 5 MAINTENANCE OF THE WASHER .....</b>	<b>55</b>
1. FILTERS	56
1.1 STRAINERS FILTERS	56
1.2 CHAMBER FILTERS	56
2. SHUT DOWN AT END OF DAY	56
3. EXTERNAL MAINTENANCE OF THE WASHER	57
3.1 CLEANING METHOD	57
3.2 CLEANING PRODUCTS	57
4. DECONTAMINATION OF THE MACHINE AND PARTS	58
4.1 WHEN TO DECONTAMINATE THE WASHER?	58
4.2 HOW TO DECONTAMINATE THE MACHINE?	58
5. PREVENTIVE MAINTENANCE	59
6. PREVENTATIVE MAINTENANCE SCHEDULE	59
7. RECOMMENDED SPARE PARTS 810 LX – 815 LX	60
8. DISPOSAL OF WASHER	60
<b>CHAPTER 6 PROBLEMS .....</b>	<b>61</b>
1. INCIDENTS	62
1.1 THE DETERGENT OR NEUTRALIZING AGENT DOES NOT ENTER THE WASHER	62
1.2 THE WASHER DOES NOT FUNCTION	62
1.3 ABNORMAL NOISE	62

---

<b>2. WARNINGS</b>	<b>63</b>
2.1 LACK OF PRODUCTS	63
2.2 HOT CHAMBER	63
2.3 FULL BASIN	63
2.4 MAINTENANCE REMINDER	64
2.5 PREVENTATIVE MAINTENANCE REQUIRED	64
<b>3. FAULT ALARMS</b>	<b>65</b>
3.1 FAULT N°1 PROBE FAULT.	65
3.2 FAULT N°2 EMPTYING FAULT.	65
3.3 FAULT N°3 HEATING EXCESS.	66
3.4 FAULT N°4 HEATING FAULT.	66
3.5 FAULT N°5 NO WATER.	67
3.6 FAULT N°6 DOOR FAULT	67
3.7 FAULT N°7 LEVEL FAULT.	67



---

## CHAPTER 1 INTRODUCTION

---

You have in your possession a GETINGE LANCER washer.

Its good working and your entire satisfaction depend on the attention you pay when reading this guide.

You will find here some advices about the use, the loading and the maintenance. Follow them, as they have been written in your interest.

Before using your washer, learn to know it and use it rightly, so it will do for many years the job it was developed for.

## 1. COPYRIGHT – LIABILITY

All rights reserved.

GETINGE LANCER pays close attention to all technical developments and continuously seeks to improve its products and services in order to provide an adequate response to the needs of its clients.

GETINGE LANCER therefore reserves the right to modify the related documentation without prior notice.

## 2. MANUFACTURER

The LABEXIA range is manufactured in our Center of Excellence in washers glassware:

GETINGE LANCER  
30, Bd de l'Industrie - Z.I. Pahin  
31170 Tournefeuille - France

## 3. 810 LX / 815 LX RANGE

810 LX / 815 LX washers belongs to the LABEXIA range of washers and washer for the cleaning and drying of labware in the chemistry, microbiology, quality control and analytical laboratories.

Fully programmable, easy to use, 810 LX/ 815 features the automatic electric door locking for the users comfort and safety.

Some of the main features of 810 LX / 815LX washers:

- Microprocessor control, with 4 pre-set programs featuring programmable parameters
- Easy loading and unloading thanks to the ergonomic loading level (plinth option), the extractable runners for the baskets and the automatic electric door lock.

This washer has been developed and manufactured following the standards (CE or UL).

For the washers in conformity with the CE standards, a "CE conformity declaration" is delivered with the machines.

## 4. USER MANUAL

The present manual is destined to facilitate the operations of use, handle, maintenance and repair.

This only concerns the operations to be done by an owner of code user.

Before using your washer and in order to obtain the best service read carefully the following advices and recommendations. Follow them, as they have been written in your interest.

Respecting the precautionary measures of use, the washer must only be used for the washing operations described in the manual.

This manual is divided in 6 chapters, completed by an appendix.

You have just ended the reading of **chapter 1**.

**Chapter 2** will familiarize yourself with your washer in order to use it as correct as possible.

**Chapter 3** describes step by step the washing process, of launching a cycle at the end of this one.

**Chapter 4** introduces the different traceability systems available in the LABEXIA LX range washers-dryers.

**Chapter 5** describes the operations of internal and external maintenance of your washer in order to keep it in good state as long possible.

**Chapter 6** is a description of the different working incidents that you could find when using your washer.

All over this manual, we have incorporated brief comments and icons to help you locate the important information.

When you see this icon, it means:



: ATTENTION !! PAY SPECIAL ATTENTION !!



---

## CHAPTER 2 BEFORE YOU START

---

After having installed rightly your washer, following the installation manual, you can begin to familiarize with this one.

You will find in this chapter all the information of indispensable knowledge to assure the good working and avoid material and corporal damage.

## 1. SAFETY ADVICES

This apparatus, dedicated to an industrial use, has been developed to wash and dry glassware, labware in the chemistry, microbiology, quality control and analytical laboratories ...



This washer must be used under the normal conditions of operation in conformity with the instructions manual of the manufacturer  
We decline any responsibility and guarantee in the event of non-respect of these recommendations which can involve body or material damages

- use only products of washing and cleaning certified for employment with washers of laboratory glassware.
- if before washing, you treat your material of laboratory using solvents and in general, all produced flammable or with strong detonating capacity, do not introduce immediately it into the chamber of the apparatus.
- In the same way, it is strongly recommended not to use solvents or aerosols near the apparatus.
- If incidents occur and you cannot solve them using solutions that we recommend you, do not hesitate to contact GETINGE LANCER's technical assistance service.

### 1.1 PRECAUTIONS FOR USE



TEMP. > 60°C

(D) NICHT WÄHREND  
DEM SPÜLGANG ÖFFNEN  
(F) NE PAS OUVRIR EN  
FONCTIONNEMENT  
(GB) DO NOT OPEN WHEN FUNCTIONING  
(NL) NIET OPENEN TIJDENS PROCES



It is strictly prohibited to use the washer in an explosive environment or to use solvents, hydrocarbons, nitric acid, alcohol, alcohol derivatives, or other flammable products in the machine.



**SAFETY GLASSES OBLIGATORY**



**SAFETY GLOVES OBLIGATORY**

Risk for operator depends on the products (detergents and acids) used inside the machine and on the nature of deposit on washing items.

Wearing safety glasses and gloves must not be sufficient in some cases.

**Operator has to read safety data sheets of used products (delivered with the washer) so as to prevent risk before opening the door.**

1.2 USE



**DO NOT FORCE DOOR LOCKING DEVICE DURING A WASHING CYCLE**

This machine uses detergent (caustic) and acid additives with elevated (95°C) temperatures in the chamber during the different phases of the wash cycle. Opening the door during the wash cycle can cause **EXPOSURE TO HIGH TEMPERATURES AND HAZARDOUS CHEMICALS AND VAPORS.**


WASH CYCLE INTERRUPTED BY OPENED DOOR

If the wash chamber door is opened during the wash, the wash cycle is stopped and is considered unsuccessful. The machine will return to its initial state. The wash cycle should be restarted using the steps contained in this manual

WASH CYCLE INTERRUPTED BY ALARM CONDITION


If the machine goes into an alarm condition, the wash cycle is stopped and is considered unsuccessful. The machine will return to its initial state. Resolve the problem then restart the cycle

## 2. OPENING THE WASHER'S DOOR

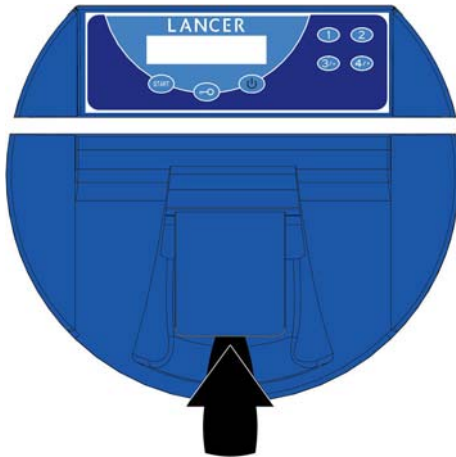

Pull the handle and lower the door to the horizontal position.

At start of cycle, door is automatically locked.

If a "CYCLE ALARM" occurs, unlock the door by pressing on button  then open the door.

At end of cycle, wait few seconds to allow door unlocking then open the door



Do not force to open the door during a washing cycle, door safety locking device can be damaged.



Do not climb or sit on the door.

## 3. MAXIMUM CHARGE

Respect the maximum charge allowed for the loading at the door and upper level.

Do not climb or sit on the door.

When several racks are used simultaneously on the different levels, only one rack should be pulled out of chamber on the door and the runners at a time.

Maximum charge permissible allowed (basket + items to be washed) on the different levels is :

Door level to avoid tilting	44 kg
	52 kg (if plinth)
First level in the chamber	26 kg
Upper level in the chamber	23 kg

**Check that your basket may support the weight of your parts to be washed.**

You should only use baskets that are suitable for the parts to be washed. When your washer is put into service, our technicians will give you useful advice on the best way to load the racks relative to the items to be washed.

It is possible to strengthen the baskets to your request, please feel free to contact GETINGE LANCER for advice or assistance.



## 4. WASHING PRODUCTS



THE PROGRAMS PREESTABLISHED WITH THIS WASHER HAVE BEEN VALIDATED WITH THE GETINGE LANCER WASHING PRODUCTS.

### 4.1 WASHING PRODUCTS CATEGORIES

#### NON-FOAMING DETERGENT

Using the correct non-foaming detergent is required for proper cleaning in this machine. The non-foaming detergent must be matched to remove the contamination source in order to ensure satisfactory washing.

IT IS STRICTLY PROHIBITED TO USE SOLVENTS AS DETERGENT.

PLEASE REFER TO SUPPLIERS MATERIAL SAFETY DATA SHEET FOR SPECIFIC SAFETY AND FORMULATION INFORMATION REGARDING THE DETERGENT USED IN THIS EQUIPMENT.

THE PROGRAMMED CYCLES ON THIS WASHER HAVE BEEN VALIDATED WITH LANCER CHEMICALS.

#### NEUTRALIZING ACID

Using the correct non-foaming neutralizing acid is required for proper cleaning in this machine. The non-foaming neutralizing acid must be matched to remove the detergent source in order to ensure satisfactory washing.

THE USE OF NITRIC ACID IS PROHIBITED. ONLY DILUTE PHOSPHORIC, ACETIC AND CITRIC ACIDS CAN BE USED.

PLEASE REFER TO SUPPLIERS MATERIAL SAFETY DATA SHEET FOR SPECIFIC SAFETY AND FORMULATION INFORMATION REGARDING THE ACID USED IN THIS EQUIPMENT.

THE PROGRAMMED CYCLES ON THIS WASHER HAVE BEEN VALIDATED WITH LANCER CHEMICALS.

### 4.2 INSTRUCTIONS TO RESPECT IN CASE OF HANDLING THE WASHING PRODUCTS



ANYBODY CALLED TO HANDLE THE WASHING PRODUCTS MUST BE INFORMED OF THE IMPLICATED RISKS TO THESE PRODUCTS.

### 4.3 INSTRUCTIONS TO RESPECT IN CASE OF CHANGING THE PRODUCT FORMULA

Before changing to a different type or brand of cleaning chemical (acid or detergent) it is necessary to rinse the plumbing circuitry of the machine. Install the new chemical(s) per the installation instructions and then prime the detergent and acid pumps. Then a wash cycle can be programmed and run which uses several rinses with water only. This will prevent any cross contamination of chemicals.

After the new cleaning chemical have been installed, it will be necessary to adjust the chemical dosing times in all applicable steps of the wash cycle in order to match the formulation of the new cleaning chemicals.

**Please contact GETINGE LANCER for advice or assistance.**

### 4.4 CHANGE OF THE TANKS

Before launching the cycle, check product tank levels and change those with low levels so as to avoid bad washing because of a lack of additive.

### WHEN TO CHANGE THE CHEMICAL CONTAINERS

This message is displayed when the chemical bottles are almost empty.



It is necessary to fill or change the detergent or acid containers to continue the cycle.

### HOW TO CHANGE THE CHEMICAL CONTAINERS ?


Press  button to switch off the washer.

Use the necessary protection for the chemical to be changed (gloves, mask, safety glasses...) .

Locate the container(s) that need to be changed.

Unscrew the cap(s) from the empty chemical bottle(s) and take out the chemical suction tube(s).

Unscrew the cap(s) from the full chemical bottle(s) and insert the chemical suction tube(s). Tighten the cap(s) to secure the chemical suction tube in place.

Press  button to switch the washer on.

Dispose of used chemical bottles or caps according to local and company regulations. Please consult the Material Safety Data Sheet for specific information regarding the chemicals used in the washer.

## 5. EXTERNAL PRINTER (OPTION)

### 5.1 CHECKING THE PRINTER

Before launching any cycle or reprinting the printout, check the quantity of paper of the printer roller.

### 5.2 CHOICE OF THE SUITABLE PAPER ROLLS

It is recommended that a high quality thermal paper be used with a minimum of seven years life expectancy. The use of non-approved products can cause dust and increased wear. This can affect the warranty. The paper roll is delivered separately in order to prevent it from unrolling or becoming damaged during transport. Consult your GETINGE LANCER representative about suitable paper rolls.

### 5.3 REMOVING PAPER AND CLEARING PAPER JAMS


If there is some paper in the printer when a new roll is necessary or a paper jam has occurred, simply open the cover and press the paper advance button.

### 5.4 LOADING PAPER

1. Slide the cover opening button forward until it opens.

2. Unroll a small amount of paper and insert the paper roll in the printer.

3. Close the cover, the paper has been loaded.

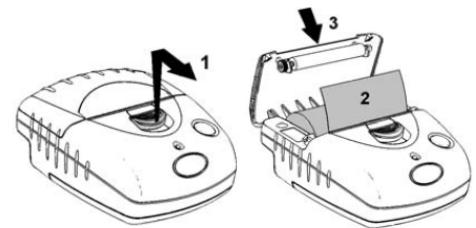

Pressing on the paper advance button while the printer is on standby mode makes the paper advance. However, the advance button has several other functions:

⇒ Pressing the button once and releasing it:

- In standby mode, makes the paper advance.
- In sleep mode, makes the printer go into the standby mode.

⇒ In standby mode, a “double click” on the button, prints out a sample message.

### 5.5 OPERATING MODES

“Stand-by mode”: ready to receive data but there is no data waiting to be printed out in the buffer and the printer engine is not turning.

“Sleep mode”: actually disabled. If the paper advance button is pressed, the external charger connected or external data is received, the printer leaves sleep mode and enters stand-by mode. The LED is off in sleep mode.

There is no switch. Powering up is automatic or carried out by a command received from the washer-disinfector. To save energy, the printer enters sleep mode after a period of inactivity. The printer can be also programmed to always remain active or to enter sleep mode on command.

### 5.6 PRINTER MAINTENANCE

After a certain time of use, it may prove necessary to remove paper dust from inside and around the mechanism. Use a small vacuum for cleaning.

## 5.7 NOTE PRINTING

If the printer is connected to a battery pack and not an AC battery charger, it is imperative to control the operating mode (sleep mode / idle mode) of your printer prior to launch the printing.

In the user menu, you can access to the reprinting cycles tickets and in the supervisor menu for printing:

- program parameters
- configuration settings.

**If the printer is in sleep mode, the data launched from these menus will be lost.**

It is imperative to enable the printer by pressing the paper feed button to launch printing.

If printing has been requested without idle mode setting of the printer, it may be necessary to power off and on again your washer and printer to reset them.


Do not hesitate to consult GETINGE LANCER for advice.

## 6. USING OF THE ACCESSORIES




### 6.1 SOME EXAMPLES


In order to wash items in "TE" or "TH" type baskets, place the baskets on the "PS" (basic rack) or "PSB" (basic rack with spray arm) after removing one or more "GS" (support grids). Check that the basket is correctly fitted on the rods of the rack designed for that purpose. Reinstall the grilles for any washing operation that does not require the use of "TE" or "TH" type baskets.

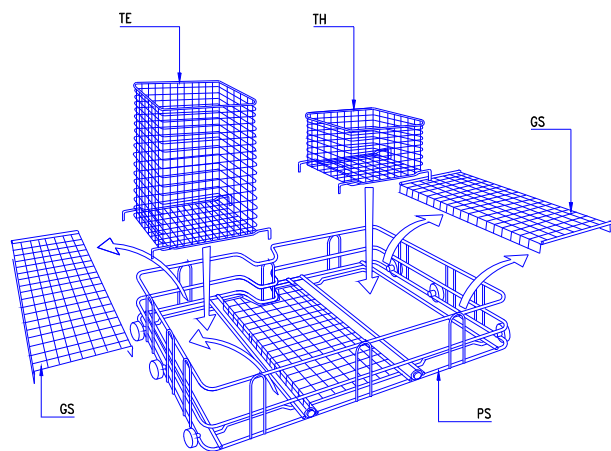

Note : The "PS" should only be positioned at the bottom level of the washer chamber where washing action is provided by the lower spray arm. The "PSB" can be positioned on any level.


It is extremely important that the items to be washed are prevented from moving in order to obtain correct cleaning and to avoid breakage of fragile items. Items that can be easily moved or knocked over when loaded on the "PS" or "PSB" rack should be secured in place. The "GC" hold down screen should be used for "PS" or "PSB" racks. The "GCI" hold down screen should be used for injector racks.

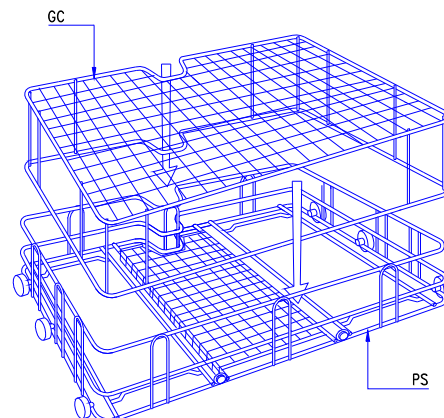

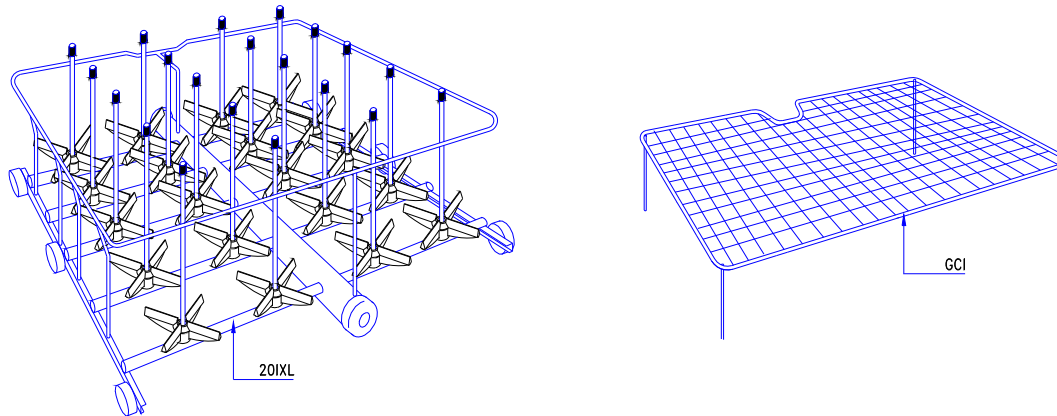

In the case of washing items with small diameter openings such as volumetric flasks, it is very important that the flow rate of the injectors used must be lower than the flow capacity of the flasks to be washed in order to avoid a gradual filling of the flasks during the washing cycle. If the diameter of the opening is too small to allow the water to escape from around the injector the mechanical action of the injector can be absorbed by the water contained in the glassware giving poor cleaning results. It is imperative to use baskets with injectors of proper diameter and, above all, to secure lightweight items with a "GC" or "GCI" hold down screen.

In order to wash items on a "PL" type basket (for cleaning slides), place the baskets on the "PS" (basic rack) or "PSB" (basic rack with spray arm) after removing one or more "GS" (support grids). Check that the basket is correctly fitted on the rods of the rack designed for that purpose. Reinstall the grilles for any washing operation that does not require the use of "PL" type baskets.

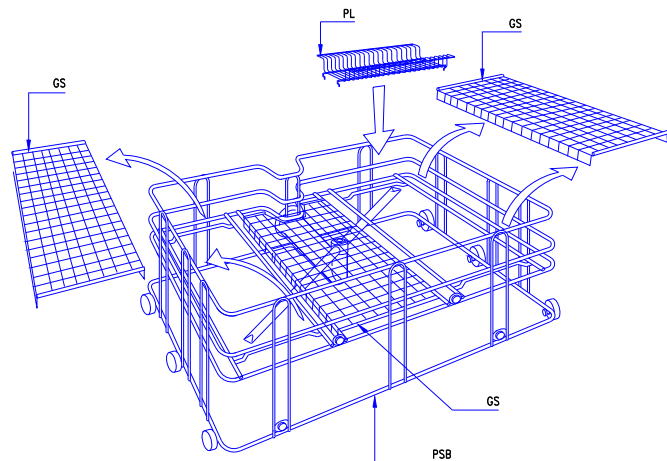


You should only use baskets that are suitable for the parts to be washed. When your washer is put into service, our technicians will give you useful advice on the best way to load the racks relative to the items to be washed.

**Please feel free to contact GETINGE LANCER for advice or assistance.**

When several racks are used simultaneously on the different levels, only one rack should be pulled out of chamber on the door and the runners at a time.

## 6.2 FITTING THE BASKETS

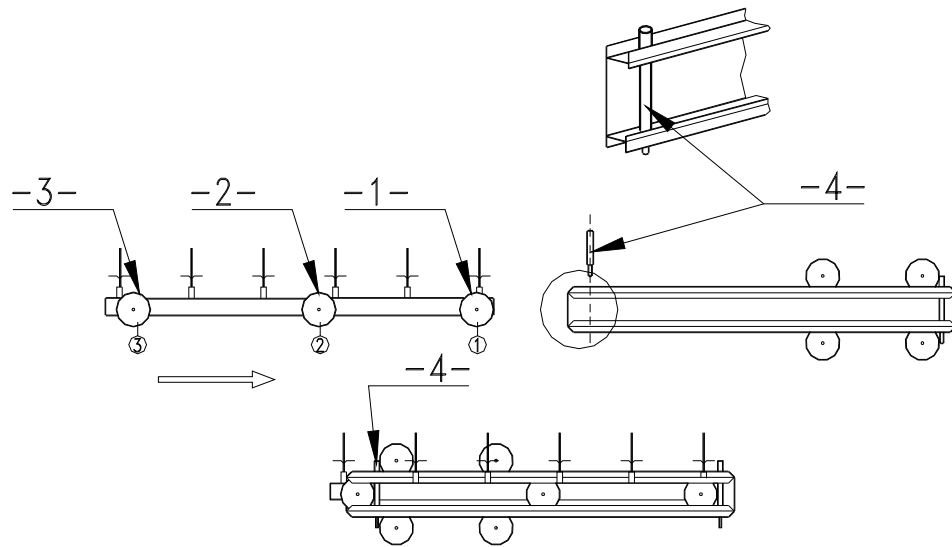

1-2-3 BASKET WHEELS  
4 PIN

- Pull the slide rails out of the chamber.
- Remove the front pins.
- Insert wheels 1 and 2 of the basket in the slide rails.
- Fit the pins back in place between wheels 2 and 3.



The choice of the baskets and racks is very important to efficient cleaning.  
Please feel free to contact GETINGE LANCER for advice or assistance.





---


## CHAPTER 3 WASHING CYCLE LAUNCHING

---

This chapter has been made to enable to function your washer.

You will get the launching procedure of a washing cycle and the manipulations to do at the start and the end of cycle.

## 1. DESCRIPTION AND BASIC FUNCTIONS OF KEYPAD

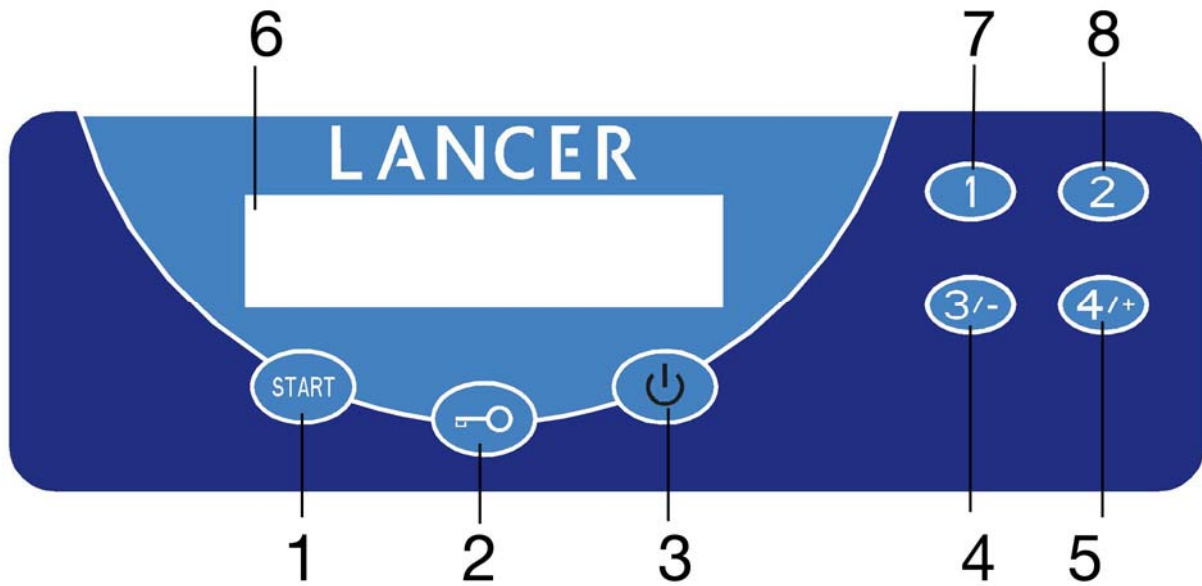

Legend :

1	START" BUTTON
2	ENTER BUTTON (FOR PROGRAMMING) / DOOR UNLOCK
3	WASHER POWER ON/OFF BUTTON
4	BUTTON 3 / "-" FUNCTION BUTTON
5	BUTTON 4 / "+" FUNCTION BUTTON
6	LIQUID CRYSTAL DISPLAY UNIT
7	BUTTON 1
8	BUTTON 2

## 2. LAUNCHING OF A CYCLE



BEFORE START, VERIFY THAT THE TAPS OF ENTRANCE OF WATER ARE OPENED.

### 2.1 SWITCHING ON

Push the key .

The display indicates the number of the last executed program and the type of washer.

P R O G R A M N ° 0 4  
L A N C E R

If the previous cycle has been stopped before the end, the display indicates:

W A R N I N G  
F A U L T Y C Y C L E

Press  to return to the initial state.

### 2.2 CYCLES

The washer is delivered with 4 pre-established programs at the factory (see pages 46 to 48). Enter the number of the program to select the cycle, with the help of the keys of the numeric keypad.

#### PROGRAMME 01: VOLUMETRIC FLASKS

- Prewash with cold water with the detergent
- Wash with hot water with the detergent.
- Acid rinse with the neutralizant acid
- Rinse with demineralised water
- Final rinse at 50° with demineralised water (only on 810LX)

PROGRAMME 02: BACTERIOLOGY, VIROLOGY

- Prewash with cold water with the detergent
- Wash with hot water with the detergent.
- Acid rinse with the neutralizant acid
- Final rinse at 80° with demineralized water
- Drying at 100° (only on 815Lx)

PROGRAMME 03: CHEMISTRY, BIOLOGY


- Prewash with cold water with the detergent
- Wash with hot water with the detergent.
- Acid rinse with the neutralizant acid
- Rinse with demineralized water
- Final rinse at 80° with demineralized water
- Drying at 100° (only on 815Lx)

PROGRAMME 04: GELOSE

- Prewash with cold water with the detergent
- Wash with hot water with the detergent.
- Acid rinse with the neutralizant acid
- Rinse with demineralized water
- Final rinse at 80° with demineralized water
- Drying at 100° (only on 815Lx)

NOTE: other programs can be pre-established depending on their necessities

## 2.3 LAUNCHING THE CYCLE

After choosing the washing cycle number,  
push on  button and one of the following screens will be displayed :

- a) the display indicates :
- the selected cycle number,
  - the temperature in the chamber,
  - the current function : "PREWASH 1".



0 4      C Y C L E   S T A R T  
E M P T Y I N G   S T A R T

The cycle will be carried out without requiring any further action.


- b) If the chemical container(s) are empty, the display indicates :



W A R N I N G  
L A C K   O F   C H E M I C .

It is necessary to fill or change the detergent or acid container to start the cycle.

- c) If there is water in the basin following the interruption of the previous cycle or due to abnormal addition of water, the display indicates :

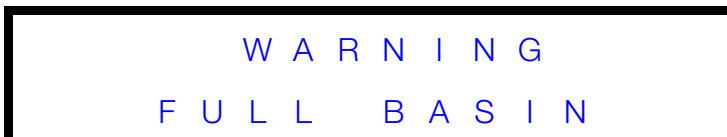

W A R N I N G  
F U L L   B A S I N

The washer will empty automatically and the cycle then proceeds normally.

- d) If the temperature probe is defective, the display indicates :









F A U L T      N ° 0 1  
P R O B E   D E F E C T

The probe must be replaced prior to operation of the machine.




AT THE END OF THE CYCLE, LET COOL THE SUPPORTS,  
BASKETS, ACCESORIES AND WASHED OBJECTS BEFORE  
HANDLING THEM.

2.4 INFORMATION AVAILABLE DURING THE WASH CYCLE

BUTTON	DISPLAY	INDICATION	COMMENT
	<b>22 PREWASH1</b> Bas cuve : 37°C	Temperature at bottom of chamber	Instantaneous temperature read by the probe located in bottom of chamber
	<b>03 WASH</b> T° prog. : 70°C	Programmed temperature	Programmed temperature for phase in progress
	<b>03 LAVAGE</b> T. phase : -02m42s	Remaining time of the phase	Decreasing time of a phase memorized starting from the same complete cycle already carried out
	<b>03 LAVAGE</b> T. phase : 00m53s	Past time of the phase	Past time of the phase in progress
	<b>03 LAVAGE</b> T. phase : 04m00s	Programmed time of the phase	Time programmed for the phase in progress
	<b>03 WASH</b> T. sequ. : 02m43s	Sequence duration	Past time of the sub phase (sequence) in progress
	<b>03 WASH</b> T.maxi: -1h01m28s	Maximum time remaining	Decreasing time of the cycle in progress
	<b>03 WASH</b> T.maxi: 0h04m18s	Past time	Past time of the cycle in progress
	<b>03 WASH</b> T.maxi: 1h05m32s	Maximum time	Maximum time remainder of the cycle memorized starting from the same complete cycle already carried out
	<b>03 WASH</b> Filling	phase in progress	Name of the phase in progress
	<b>03 WASH</b> level waiting	Information on the phase in progress	Information on the progress of the phase
	<b>03 WASH</b> Chemistry Biology	Programme name	Name of the programme in progress
	(no specific display)	Fast advance	Allows to skip a phase of the cycle (if selected ON in the configuration machine)
	<b>03 WASH</b> R1->8 : 00000000	Relay status: 1 to 8	If test mode is activated, the display indicates status of the relays from 1 to 8
	<b>03 WASH</b> R9 : 0	Relay status: 9	If test mode is activated, the display indicates status of the relays from 9 to 16

### 3. END OF CYCLE

#### 3.1 OPENING OF THE DOORS




BURN RISK IF THE DOOR IS OPENED OVER 60°C.  
AT THE END OF THE CYCLE, LET COOL THE SUPPORTS,  
BASKETS, ACCESORIES AND WASHED OBJECTS BEFORE  
HANDLING THEM.

If the chamber temperature is higher than 60°C, a prevention message appears.



The display indicates "END OF CYCLE".





Wait few seconds for unlocking device before opening the door.

#### 3.2 OPENING

Proceed as described *page 16*.

### 3.3 REPRINTING OF THE TICKET

For washers equipped with the printer (option), it is possible to print the ticket again in the following cases:


- need of a second ticket
- lack of paper (end of roll)
- poor printout

Press the keys  and .



Each ticket is stored according to a specific ticket number.  
This number (0 to 65000) is printed on ticket.

Choose with keys  or , ticket number to be printed, (0 to 65000).

Validate with the  key.



Wait for the complete impression of the ticket before launching a new washing cycle.

### 3.4 SWITCHING OFF


Press  to switch off the washer.

Close the water valves.


Remove and clean the basin filters (see page 56).



## 4. ACCESS TO USER MENU

Switch on the appliance by pressing .

The display indicates the number of the last cycle performed.

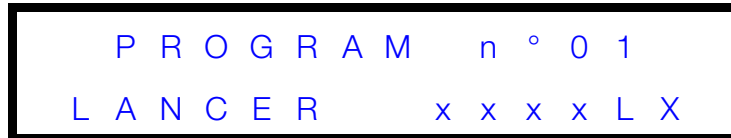

P R O G R A M   n ° 0 1  
L A N C E R   x x x x L X

Press and hold  button for 3 seconds to validate.



A C C E S S   C O D E  
- - - -

Enter the access code - LEVEL 1 / USER -.

If an incorrect code is entered, the following error message is displayed.



A C C E S S   C O D E  
I N C O R R E C T   C O D E

Press and hold  button for 3 seconds to validate.

You must re-enter the correct access code.

Otherwise you access to user menu.



O P E R A T O R   M E N U  
P a r a m .   p r o g r a m

Note :

If the access code is not entered within 1 minute, the display unit returns to its initial state.

#### 4.1 MODIFYING THE WASHING CYCLES



It is not recommend to set wash programs at maximum values for time and temperature as this will result in reduced equipment life and increased maintenance frequency of equipment.

If you wish to create a custom wash program, please refer to the factory default programs for examples of typical times and temperatures.

You may also contact your GETINGE LANCER representative for advice on creating wash programs.


After accessing to user menu, you must choose **PARAM. PROGRAMME** with **4/+** and **3/-** buttons to modify the washing cycle.

Accept with **OK** button.



Choose the cycle number to modify with **1**, **2**, **3/-**, **4/+**.

Accept with **OK** button.

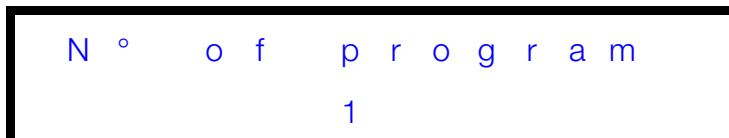

If a cycle phase is programmed with a time of 00m00s that phase will be skipped when the wash cycle is executed.

Choose the time for prewash 1 : 0 to 30 mn 59 s.

Select the minutes with **4/+** and **3/-** buttons. Accept with **OK** button.

Select the seconds with **4/+** and **3/-** buttons. Accept with **OK** button.



Choose water for PREWASH 1 phase: cold water mains or purified water

Select with (4/+) and (3/-) buttons.

Accept with (OK) button.

1 P R E W A S H 1  
C o l d W a t e r m a i n s

Choose the temperature of pre-wash 1 (0 to 95° C) / (0 to 85°C for 120v mono/60hz washer) with (4/+) and (3/-) buttons. Accept with (OK) button.

1 P R E W A S H 1  
T e m p . = 7 5 °

Choose the detergent intake time : 0 to 6 mn 59 s.

1 second will deliver approximately 5 ml of chemical.

Note : The volume of water in the wash chamber is approximately 12 liters.

Select the minutes with (4/+) and (3/-) buttons. Accept with (OK) button.

Select the seconds with (4/+) and (3/-) buttons. Accept with (OK) button.

1 P R E W A S H 1  
D E T E R G E N T = 0 0 m 1 2 s

If washer is equipped with neutralizing option, choose additive intake time : 0 to 6 mn 59s.

1 second will deliver approximately 5 ml of chemical.

Note : The volume of water in the wash chamber is approximately 12 liters.

Select the minutes with (4/+) and (3/-) buttons. Accept with (OK) button.

Select the seconds with (4/+) and (3/-) buttons. Accept with (OK) button.

1 P R E W A S H 1  
N E U T R A L = 0 0 m 0 6 s

Note :

Set the PREWASH 2, PREWASH 3 and WASH functions in the same way.

Select the number of running water rinses 1 (0 to 9), with (4/+) and (3/-) buttons.

Accept with (OK) button.

1 R U N N . W A T E R 1  
N U M B E R 1

Choose water for RUNNING WATER RINSE 1 phase: cold water mains or purified water

Select with **4/+** and **3/-** buttons.

Accept with **OK** button.

1 R U N N . W A T E R 1  
C o l d W a t e r m a i n s

Select the duration of the acid rinse : 0 to 30 mn 59 s.

Select the minutes with **4/+** and **3/-** buttons. Accept with **OK** button.

Select the seconds with **4/+** and **3/-** buttons. Accept with **OK** button.

1 A C I D R I N S E  
R e c y c l i n g = 0 2 m 0 0 s

Choose water for ACID RINSE phase: cold water mains or purified water

Select with **4/+** and **3/-** buttons.

Accept with **OK** button.

1 A C I D R I N S E  
C o l d W a t e r m a i n s

Choose the acid rinse temperature : (0 to 95° C) / (0 to 85°C for 120v mono/60hz washer)

Select with **4/+** and **3/-** buttons.

Accept with **OK** button.

1 A C I D R I N S E  
T E M P = 3 8 °

Choose the acid intake time : 0 to 6 mn 59 s.

1 second will deliver approximately 5 ml of chemical.

The volume of water in the wash chamber is approximately 12 liters.

Select the minutes with **4/+** and **3/-** buttons. Accept with **OK** button.

Select the seconds with **4/+** and **3/-** buttons. Accept with **OK** button.

1 A C I D R I N S E  
A C I D = 0 0 m 3 0 s

If washer is equipped with neutralizing option, choose additive intake time : 0 to 6 mn 59s.  
1 second will deliver approximately 5 ml of chemical.

Note : The volume of water in the wash chamber is approximately 12 liters.

Select the minutes with **4/+** and **3/-** buttons. Accept with **0** button.

Select the seconds with **4/+** and **3/-** buttons. Accept with **0** button.

1 A C I D R I N S E  
N E U T R A L = 0 0 m 0 6 s

Select the number of running water rinses 2 (0 to 9), with **4/+** and **3/-** buttons.

Accept with **0** button.

1 R U N N . W A T E R 2  
N u m b r e = 0 1

Choose water for RUNNING WATER RINSE 2 phase : cold water mains or purified water

Select with **4/+** and **3/-** buttons.

Accept with **0** button.

1 R U N N . W A T E R 2  
C o l d W a t e r m a i n s

Select the duration of cold demin. (\*) 1 : 0 to 30 mn 59 s.

Select the minutes with **4/+** and **3/-** buttons. Accept with **0** button.

Select the seconds with **4/+** and **3/-** buttons. Accept with **0** button.

\* *Demin.* = demineralized, distilled or osmosis-treated water

1 C O L D D E M I 1  
R e c y c l a g e = 0 1 m 0 0 s

Choose water for COLD DEMI RINSE 1 phase: purified water

Select with **4/+** and **3/-** buttons.

Accept with **0** button.

1 C O L D D E M I 1  
P U R I F I E D W A T E R

Note : Set the COLD DEMIN.2, COLD DEMIN.3 and COLD DEMIN.4 functions in the same way.

Select the duration of the hot demin.\* rinse : 0 to 30 mn 59 s.

Select the minutes with **4/+** and **3/-** buttons. Accept with **OK** button.

Select the seconds with **4/+** and **3/-** buttons. Accept with **OK** button.

1        H O T    D E M I  
R e c y c l i n g = 0 1 m 0 0 s

Choose water for HOT DEMI RINSE phase: purified water

Select with **4/+** and **3/-** buttons.

Accept with **OK** button.

1        H O T    D E M I  
P U R I F I E D   W A T E R

Select the temperature of the hot demin.\* rinse (0 to 95° C) / (0 to 85°C for 120v mono./60hzwasher) with **4/+** and **3/-** buttons. Accept with **OK** button.

1        H O T    D E M I  
T e m p .        = 7 5 °

Select the duration of drying : 0 to 90 mn.

2 minutes cooling is automatically included to this drying time (for example : 20 minutes duration = 18mn drying + 2mn cooling)

Select the minutes with **4/+** and **3/-** buttons. Accept with **OK** button.

Select the seconds with **4/+** and **3/-** buttons. Accept with **OK** button.

1        D R Y I N G  
T i m e        =    0 1 m 0 0 s

Select the duration of cooling (duration of cooling in 120v mono/60hz): 0 to 30 mn 59 s.

Select the minutes with **4/+** and **3/-** buttons. Accept with **OK** button.

Select the seconds with **4/+** and **3/-** buttons. Accept with **OK** button.

1        D R Y I N G  
P a u s e        =    0 1 m 0 0 s

e n d o f m e n u

The display unit returns to user menu.

O P E R A T O R M E N U  
R e a d i n g p r o g r a m .

## 4.2 SEQUENCES READING OF ONE WASHING CYCLE

After accessing to user menu, you must choose **READING PROGRAM.** with **4/+** and **3/-** buttons to read the washing cycle.

O P E R A T O R M E N U  
R e a d i n g p r o g r a m .

Accept with **OK** button.

Choose the cycle number to read with **1**, **2**, **3/-**, **4/+**.

Accept with **OK** button.

N ° o f p r o g r a m  
1



The sequencing of all the functions in the cycle is displayed by pressing on **OK** button repeatedly.

At the end of cycle, the display unit returns to user menu.

O P E R A T O R M E N U  
P u m p p r i m i n g



### 4.3 DOSING PUMP PRIMING

Once enter user menu, you must choose "Pump Priming" sub-menu using buttons  and .




OPERATOR MENU  
Pump priming

Accept with  button.




ACID  
PUMP - > OFF

Choose with button  status "ON" or "OFF" of the dosing pump.



Filling  
In Progress...

Display indicates automatic basin filling with water to dilute the cleaning chemical.

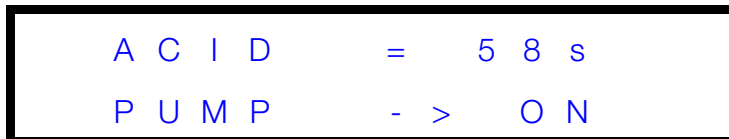

ACID = 58 s  
PUMP - > ON

Status is "ON" during 1mn for pump flow-rate checking.




Emptying  
In Progress...

Display indicates automatic basin emptying.

To select detergent pump output, press on button .




DETERGENT  
PUMP - > OFF

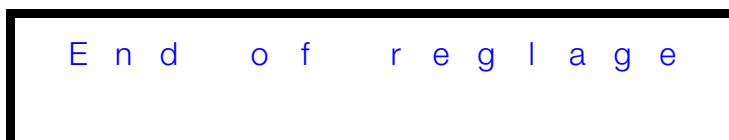

End of reglage

Press button .

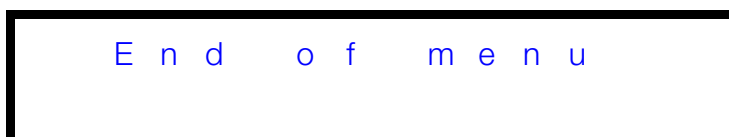

End of menu

#### 4.4 NAME CHOICE OF ONE WASHING CYCLE

In addition to being identified by its number (01, 02, 03, etc.), each programmed cycle can be given a "NAME" (examples: CHEMISTRY, BACTERIO, INSTRUMENTS, ANAESTHETIC). A maximum of 16 characters is available.

After accessing to user menu, you must choose **NAME PROGRAM.** with **4/+** and **3/-** buttons to define the name of a washing cycle.  
Accept with **Enter** button.

OPERATOR MENU  
Name of program

Choose the cycle number to modify with **1**, **2**, **3/-**, **4/+**.  
Accept with **Enter** button.

N ° of program  
1




The characters selection is got with **4/+** and **3/-** buttons.  
A press on **Enter** button, enables to accept the chosen character then to pass on next space.  
If the chosen name has less than 16 characters, fill-in blank space by pressing on **Enter** button.

Name of program

When you are on the 16<sup>th</sup> character pressing **Enter** button enable to record the programme's name and to return to the user's menu.





End of menu

#### 4.5 THE CHOICE OF MACHINE NAME

After accessing to user menu, you must choose **MACHINE NAME** with  and  buttons to define the name of the machine.  
Accept with  button.




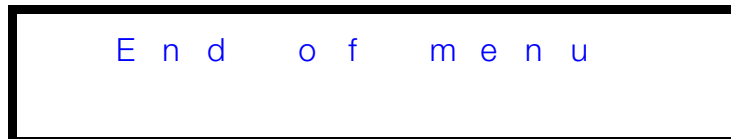
O P E R A T O R M E N U  
M a c h i n e n a m e

The characters selection is got with  and  buttons.  
Press  button to accept the chosen character and to pass on next space.  
If the chosen name has less of 16 characters fill-in empty blanks by pressing  button.





M a c h i n e n a m e

The program name is recorded in memory after the 16<sup>th</sup> character is entered by pressing the  button and to return to the user's menu.



E n d o f m e n u

#### 4.6 READING OF CYCLE FAULTS



After accessing to user menu, you must choose **FAULT CYCLES** with  and  buttons to read the 5 last faults.


Accept with  button.




Example :



Change the Ptr value with  and  buttons. You could like this read the N° and the designation the alarm previously tripped. If you select the value "0" you got the last tripped alarm, if you select the value "-1" you got the last before alarm, etc...

If you press  button, you will get any additional information about the alarm tripping.


To quit this menu, press  button.

#### 4.7 PRINTER PARAMETERS (OPTION)



This menu allows to customize 2 heading lines and 3 foot lines on the ticket (if printer option).




Accept with  button.

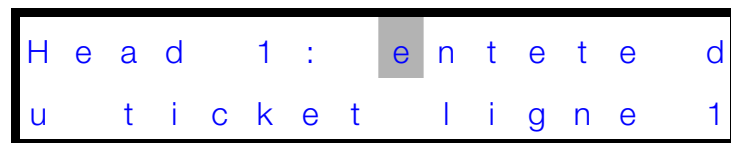

First character is flashing on top of display.


Characters are selected with the  and  keys or numeric keypad.

Each character must be validated with the key .

When the ticket line is customized, complete the line of characters with successive pressings on key .



Press on key  to go to next heading line then to foot lines.

Accept with  button.

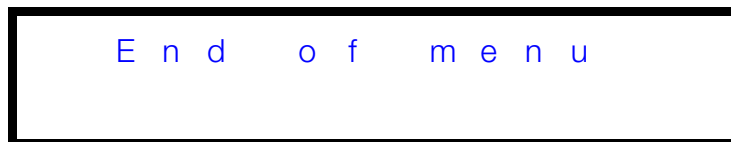

The display returns to the user's menu.

#### 4.8 RETURN TO THE INITIAL STATE

To quit the user menu, you must, choose **END OF SETTING ?** with  and  buttons.

Accept with  button.

## 5. TABLE OF FACTORY-PROGRAMMED CYCLES – 810 LX

The washer is supplied with 4 factory-programmed cycles that are designed to meet most washing needs. However, all cycles can be modified to meet customer requirements.

Water consumption estimated per phase (depends on the baskets/racks used): 12 liters.

Output from acid and detergent pumps (depends on the chemicals used): 280 ml/min.

SEQUENCES	POSSIBILITIES	Volumetric	Bacterio.	Chemistry	Agarose
		Flasks	Virology	Biology	Gel
		PROG. 01	PROG. 02	PROG. 03	PROG. 04
PREWASH TIME 1	0 to 30 mn	1	2	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
PREWASH 1 TEMPERATURE	0 to 95 °C	0	0	0	90
PREWASH 1 DETERGENT	0 to 360 s	12	12	12	30
OPTION : PREWASH 1 NEUTRALIZATION	0 to 360 s	6	6	6	15
PREWASH TIME 2	0 to 30 mn	0	0	0	1
FILLING	CWM / PW	/	/	/	CWM
PREWASH 2 TEMPERATURE	0 to 95 °C	/	/	/	0
PREWASH 2 DETERGENT	0 to 360 s	/	/	/	0
OPTION : PREWASH 2 NEUTRALIZATION	0 to 360 s	/	/	/	0
PREWASH TIME 3	0 to 30 mn	0	0	0	0
FILLING	CWM / PW	/	/	/	/
PREWASH 3 TEMPERATURE	0 to 95 °C	/	/	/	/
PREWASH 3 DETERGENT	0 to 360 s	/	/	/	/
OPTION : PREWASH 3 NEUTRALIZATION	0 to 360 s	/	/	/	/
WASH TIME	0 to 30 mn	4	4	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
WASH TEMPERATURE	0 to 95 °C	50	85	70	90
WASH DETERGENT	0 to 360 s	30	30	30	36
OPTION : WASH NEUTRALIZATION	0 to 360 s	15	15	15	18
RUNNING WATER RINSE 1	0 to 9	1	1	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
ACID RINSE TIME	0 to 30 mn	2	2	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
ACID RINSE TEMPERATURE	0 to 95 °C	0	0	0	0
NEUTRALIZING ACID	0 to 360s	30	30	30	30
OPTION : ACID RINSE NEUTRALIZATION	0 to 360 s	60	60	60	60
RUNNING WATER RINSE 2	0 to 9	1	2	1	1
FILLING	CWM / PW	CWM	CWM	CWM	CWM
COLD DEMI. TIME 1	0 to 30 mn	1	0	1	1
FILLING	PW	PW	/	PW	PW
HOT DEMI. TIME	0 to 30 mn	1	1	1	1
FILLING	PW	PW	PW	PW	PW
HOT DEMI. TEMPERATURE	0 to 95 °C	50	80	80	80

## 6. TABLE OF FACTORY-PROGRAMMED CYCLES – 810 LX – SUPPLY VOLTAGE 120V MONO / 60HZ

The washer is supplied with 4 factory-programmed cycles that are designed to meet most washing needs. However, all cycles can be modified to meet customer requirements.

Water consumption estimated per phase (depends on the baskets/racks used): 12 liters.  
Output from acid and detergent pumps (depends on the chemicals used): 280 ml/min.

SEQUENCES	POSSIBILITIES	Volumetric	Bacterio.	Chemistry	Agarose
		Flasks	Virology	Biology	Gel
		PROG. 01	PROG. 02	PROG. 03	PROG. 04
PREWASH TIME 1	0 to 30 mn	1	2	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
PREWASH 1 TEMPERATURE	0 to 85 °C	0	0	0	80
PREWASH 1 DETERGENT	0 to 360 s	12	12	12	30
OPTION : PREWASH 1 NEUTRALIZATION	0 to 360 s	6	6	6	15
PREWASH TIME 2	0 to 30 mn	0	0	0	1
FILLING	CWM / PW	/	/	/	CWM
PREWASH 2 TEMPERATURE	0 to 85 °C	/	/	/	0
PREWASH 2 DETERGENT	0 to 360 s	/	/	/	0
OPTION : PREWASH 2 NEUTRALIZATION	0 to 360 s	/	/	/	0
PREWASH TIME 3	0 to 30 mn	0	0	0	0
FILLING	CWM / PW	/	/	/	/
PREWASH 3 TEMPERATURE	0 to 85 °C	/	/	/	/
PREWASH 3 DETERGENT	0 to 360 s	/	/	/	/
OPTION : PREWASH 3 NEUTRALIZATION	0 to 360 s	/	/	/	/
WASH TIME	0 to 30 mn	4	4	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
WASH TEMPERATURE	0 to 85 °C	50	60	70	80
WASH DETERGENT	0 to 360 s	30	30	30	36
OPTION : WASH NEUTRALIZATION	0 to 360 s	15	15	15	18
RUNNING WATER RINSE 1	0 to 9	1	1	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
ACID RINSE TIME	0 to 30 mn	2	2	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
ACID RINSE TEMPERATURE	0 to 85 °C	0	0	0	0
NEUTRALIZING ACID	0 to 360s	30	30	30	30
OPTION : ACID RINSE NEUTRALIZATION	0 to 360 s	60	60	60	60
RUNNING WATER RINSE 2	0 to 9	1	2	1	1
FILLING	CWM / PW	CWM	CWM	CWM	CWM
COLD DEMI. TIME 1	0 to 30 mn	1	0	1	1
FILLING	PW	PW	/	PW	PW
HOT DEMI. TIME	0 to 30 mn	1	1	1	1
FILLING	PW	PW	PW	PW	PW
HOT DEMI. TEMPERATURE	0 to 85 °C	50	60	60	60

## 7. TABLE OF FACTORY-PROGRAMMED CYCLES - 815LX

The washer is supplied with 4 factory-programmed cycles that are designed to meet most washing needs. However, all cycles can be modified to meet customer requirements.

Water consumption estimated per phase (depends on the baskets/racks used): 12 liters.

Output from acid and detergent pumps (depends on the chemicals used): 280 ml/min.

SEQUENCES	POSSIBILITIES	Volumetric	Bacterio.	Chemistry	Agarose
		Flasks	Virology	Biology	Gel
		PROG. 01	PROG. 02	PROG. 03	PROG. 04
PREWASH TIME 1	0 to 30 mn	1	2	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
PREWASH 1 TEMPERATURE	0 to 95 °C	0	0	0	90
PREWASH 1 DETERGENT	0 to 360 s	12	12	12	30
OPTION : PREWASH 1 NEUTRALIZATION	0 to 360 s	6	6	6	15
PREWASH TIME 2	0 to 30 mn	0	0	0	1
FILLING	CWM / PW	/	/	/	CWM
PREWASH 2 TEMPERATURE	0 to 95 °C	/	/	/	0
PREWASH 2 DETERGENT	0 to 360 s	/	/	/	0
OPTION : PREWASH 2 NEUTRALIZATION	0 to 360 s	/	/	/	0
PREWASH TIME 3	0 to 30 mn	0	0	0	0
FILLING	CWM / PW	/	/	/	/
PREWASH 3 TEMPERATURE	0 to 95 °C	/	/	/	/
PREWASH 3 DETERGENT	0 to 360 s	/	/	/	/
OPTION : PREWASH 3 NEUTRALIZATION	0 to 360 s	/	/	/	/
WASH TIME	0 to 30 mn	4	4	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
WASH TEMPERATURE	0 to 95 °C	50	85	70	90
WASH DETERGENT	0 to 360 s	30	30	30	36
OPTION : WASH NEUTRALIZATION	0 to 360 s	15	15	15	18
RUNNING WATER RINSE 1	0 to 9	1	1	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
ACID RINSE TIME	0 to 30 mn	2	2	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
ACID RINSE TEMPERATURE	0 to 95 °C	0	0	0	0
NEUTRALIZING ACID	0 to 360s	30	30	30	30
OPTION : ACID RINSE NEUTRALIZATION	0 to 360 s	60	60	60	60
RUNNING WATER RINSE 2	0 to 9	1	2	1	1
FILLING	CWM / PW	CWM	CWM	CWM	CWM
COLD DEMI. TIME 1	0 to 30 mn	1	0	1	1
FILLING	PW	PW	/	PW	PW
HOT DEMI. TIME	0 to 30 mn	/	3	3	3
FILLING	PW	PW	PW	PW	PW
HOT DEMI. TEMPERATURE	0 to 95 °C	0	80	80	80
DRYING TIME	0 to 90 mn	/	25	25	25
DRYING	0 or 110°C	/	100	100	100
COOLING	0 to 30 mn	0	5	5	5



## 8. TABLE OF FACTORY-PROGRAMMED CYCLES - 815LX – SUPPLY VOLTAGE 120V MONO / 60HZ

The washer is supplied with 4 factory-programmed cycles that are designed to meet most washing needs. However, all cycles can be modified to meet customer requirements.

Water consumption estimated per phase (depends on the baskets/racks used): 12 liters.  
Output from acid and detergent pumps (depends on the chemicals used): 280 ml/min.

SEQUENCES	POSSIBILITIES	Volumetric	Bacterio.	Chemistry	Agarose
		Flasks	Virology	Biology	Gel
		PROG. 01	PROG. 02	PROG. 03	PROG. 04
PREWASH TIME 1	0 to 30 mn	1	2	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
PREWASH 1 TEMPERATURE	0 to 85 °C	0	0	0	80
PREWASH 1 DETERGENT	0 to 360 s	12	12	12	30
OPTION : PREWASH 1 NEUTRALIZATION	0 to 360 s	6	6	6	15
PREWASH TIME 2	0 to 30 mn	0	0	0	1
FILLING	CWM / PW	/	/	/	CWM
PREWASH 2 TEMPERATURE	0 to 85 °C	/	/	/	0
PREWASH 2 DETERGENT	0 to 360 s	/	/	/	0
OPTION : PREWASH 2 NEUTRALIZATION	0 to 360 s	/	/	/	0
PREWASH TIME 3	0 to 30 mn	0	0	0	0
FILLING	CWM / PW	/	/	/	/
PREWASH 3 TEMPERATURE	0 to 85 °C	/	/	/	/
PREWASH 3 DETERGENT	0 to 360 s	/	/	/	/
OPTION : PREWASH 3 NEUTRALIZATION	0 to 360 s	/	/	/	/
WASH TIME	0 to 30 mn	4	4	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
WASH TEMPERATURE	0 to 85 °C	50	60	70	80
WASH DETERGENT	0 to 360 s	30	30	30	36
OPTION : WASH NEUTRALIZATION	0 to 360 s	15	15	15	18
RUNNING WATER RINSE 1	0 to 9	1	1	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
ACID RINSE TIME	0 to 30 mn	2	2	2	2
FILLING	CWM / PW	CWM	CWM	CWM	CWM
ACID RINSE TEMPERATURE	0 to 85 °C	0	0	0	0
NEUTRALIZING ACID	0 to 360s	30	30	30	30
OPTION : ACID RINSE NEUTRALIZATION	0 to 360 s	60	60	60	60
RUNNING WATER RINSE 2	0 to 9	1	2	1	1
FILLING	CWM / PW	CWM	CWM	CWM	CWM
COLD DEMI. TIME 1	0 to 30 mn	1	0	1	1
FILLING	PW	PW	/	PW	PW
HOT DEMI. TIME	0 to 30 mn	/	3	3	3
FILLING	PW	PW	PW	PW	PW
HOT DEMI. TEMPERATURE	0 to 85 °C	0	60	60	60
DRYING TIME	0 to 90 mn	/	25	25	25
DRYING	0 or 110°C	/	100	100	100
COOLING	0 to 30 mn	0	5	5	5

## 9. USER CYCLE PROGRAMMING TABLE

The programs 11 to 14, 21 to 24, 31 to 34, 41 to 44 are free and can be programmed by yourself.

Water consumption estimated per phase (depends on the baskets/racks used): 12 liters.

Output from acid and detergent pumps (depends on the chemicals used): 280 ml/min.

SEQUENCES	POSSIBILITIES	PROG.	PROG.	PROG.	PROG.
PREWASH TIME 1 FILLING PREWASH 1 TEMPERATURE PREWASH 1 DETERGENT OPTION : PREWASH 1 NEUTRALIZATION	0 to 30 mn CWM / PW 0 to 85 °C 0 to 360 s 0 to 360 s				
PREWASH TIME 2 FILLING PREWASH 2 TEMPERATURE PREWASH 2 DETERGENT OPTION : PREWASH 2 NEUTRALIZATION	0 to 30 mn CWM / PW 0 to 85 °C 0 to 360 s 0 to 360 s				
PREWASH TIME 3 FILLING PREWASH 3 TEMPERATURE PREWASH 3 DETERGENT OPTION : PREWASH 3 NEUTRALIZATION	0 to 30 mn CWM / PW 0 to 85 °C 0 to 360 s 0 to 360 s				
WASH TIME FILLING WASH TEMPERATURE WASH DETERGENT OPTION : WASH NEUTRALIZATION	0 to 30 mn CWM / PW 0 to 85 °C 0 to 360 s 0 to 360 s				
RUNNING WATER RINSE 1 FILLING	0 to 9 CWM / PW				
ACID RINSE TIME FILLING ACID RINSE TEMPERATURE NEUTRALIZING ACID OPTION : ACID RINSE NEUTRALIZATION	0 to 30 mn CWM / PW 0 to 85 °C 0 to 360s 0 to 360 s				
RUNNING WATER RINSE 2 FILLING	0 to 9 CWM / PW				
COLD DEMI. TIME 1 FILLING	0 to 30 mn PW				
HOT DEMI. TIME FILLING HOT DEMI. TEMPERATURE	0 to 30 mn PW 0 to 85 °C				
DRYING TIME (*) DRYING (*) COOLING	0 to 90 mn 0 or 110°C 0 to 30 mn				

(\*) : Applicable only on models 815 LX.



**It is not recommend to set wash programs at maximum values for time and temperature as this will result in reduced equipment life and increased maintenance frequency of equipment.**

**If you wish to create a custom wash program, please refer to the factory default programs for examples of typical times and temperatures.**

**You may also contact your GETINGE LANCER representative for advice on creating wash programs.**

---

## CHAPTER 4 TRACEABILITY

---

These last years, TRACEABILITY has become a crucial issue. The matter is to control permanently the correct development of the washing cycle and to obtain its validation.

TRACEABILITY enables the supervision of the correct performance of parameters such as washing, chamber filling, detergent taking, effective temperature, duration of the phases.

During the development of the program all the data must be registered, archived in paper support.



Whatever the result of the cycle, you must monitor the printouts issued by the printer of the washer before classifying and filing them.

**Note :** GETINGE LANCER recommends to photocopy or scan the washing cycle printouts.

## 1. EXTERNAL PRINTER (OPTION)

### ITS ROLE:

The LANCER PRINTER gives permanently the development of the washing.

Also, it permits the stock of the information.

### ITS RESULTS:

At the end of the program, the results are registered and archived, whether on a paper support by the mean of a horodated ticket.



EXTERNAL PRINTER

(desktop printer)

## 2. THE PRO KIT (OPTION)

The washers are controlled by a programmable microprocessor. In order to obtain an independent verification of the washing process, an additional card is provided. The PRO KIT is a microprocessor independent from the controller and equipped with its own sensors and clock.

### ITS ROLE:

The PRO KIT is a system of verification of the washing parameters. It checks permanently the right development of the washing cycle and an important support for a validation, as well as the stock of the information.

### ITS RESULTS:

At the end of the program, the results are registered and archived, whether on a paper support by the mean of a horodated ticket, or on a magnetic support via a RS 232 connection.



---

## CHAPTER 5 MAINTENANCE OF THE WASHER

---

This chapter describes the maintenance operations to assure the good working of your washer.




RESIDUES OF PRODUCTS SUCH AS ACETONE, SOLVENTS, PETROLEUM, PETROLEUM DERIVATIVES, CHROMIUM SULPHATE, ACID (SULPHURIC, NITRIC, HYDROCHLORIC EVEN AT A LOW CONCENTRATION), MUST NOT BE USED OR PLACED IN THE WASHER IN ANY CIRCUMSTANCES.

## 1. FILTERS


### 1.1 STRAINERS FILTERS

Check the cleanness of the strainer filters and clean them if needed.

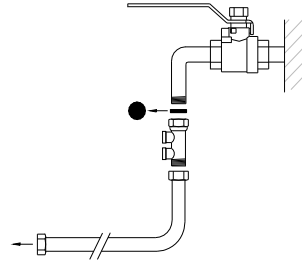

### 1.2 CHAMBER FILTERS

These two filters prevent the residues to enter the hydraulic circuit.

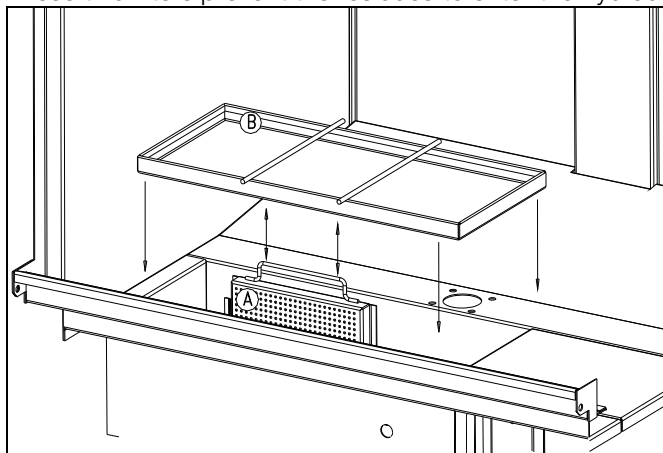

A	PUMP SUCTION FILTER
B	CHAMBER BOTTOM FILTER



DO NOT FORGET TO CLEAN THE FILTERS AFTER EACH CYCLE. IF YOU REGULARLY DO NOT CLEAN THE FILTERS, THE PERFORMANCES OF YOUR MACHINE ARE LIKELY TO BE AFFECTED FOR IT.



DO NOT FORGET TO REPLACE THE FILTERS BEFORE LAUNCHING A WASHING CYCLE

## 2. SHUT DOWN AT END OF DAY

SHUT OFF THE WATER INLET COCKS so that the valves are not left pressurized. Do not forget to open them again before using the appliance.



### 3. EXTERNAL MAINTENANCE OF THE WASHER

GETINGE LANCER washers are entirely covered with panels (bodywork) in stainless steel AISI 304L.

#### 3.1 CLEANING METHOD

The periodic maintenance cleaning must be done with a cleaning product.

Should the periodic maintenance have been largely forgotten, we recommend the use of a specific cleaning product.

The product must be applied with the help of a rag or a soft sponge, and always polishing the stainless steel in the sense of the brushing to avoid the risk of stripes.

For the drying, the best is using a rubber scraper similar to the one used to clean windows. This will avoid watering you can have with a rap cleaning.



#### 3.2 CLEANING PRODUCTS

GETINGE LANCER offers a maintenance product for stainless steel in the market under the name of LANCERSHINE.

A safe and efficient aerosol cleaning product for a use in the external side of the stainless machines and other equipments to be washed, assuring a very professional finishing.

Available in container of 450 ml. Ref: LANCERSHINE

#### DETERGENTS, SOAPS:

All the detergents, soaps or cleaning products found in shops can normally be used, but they MUST NOT contain chlorinated products. Domestic soaps for dishwashers or washing machines are particularly adapted to the periodical cleaning.

#### ABRASIVE DUSTS:

These products can stripe the stainless steel surfaces and modify then the aspect, at least locally. Even that, their use can be useful to eliminate by scraping the adherent spots.


#### ACID PRODUCTS:

The resource to these acid-cleaning products must only be used in specific cases.

Vinegar (acetic acid) can be used to remove stains left by minerals.

There are phosphoric acid-based or nitric acid-based products specially conceived for the cleaning of stainless steels. It is convenient to follow strictly the instructions given by theirs manufacturers.

The chloric disinfectants must only be used with caution: diluted solution in cold water, short contact time, abundant rinsing.

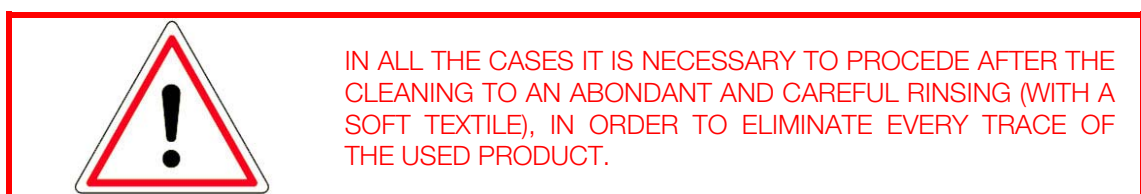

## 4. DECONTAMINATION OF THE MACHINE AND PARTS


### 4.1 WHEN TO DECONTAMINATE THE WASHER?

Special care must be taken to protect users and maintenance personnel from coming in contact with the chemicals, temperatures, and hazardous materials that may be used in this machine. This can occur due to a wash cycle being prematurely interrupted by opening the door, turning off power, or an alarm condition.

If the door has been inadvertently opened, the machine should be allowed to cool down for one hour then the door should be shut and the cycle restarted. If the power has been inadvertently turned off, it should be turned on and the cycle restarted.

If the washer has stopped due to an alarm condition that requires a maintenance technician, the maintenance technician must decontaminate the machine before performing the repairs.

### 4.2 HOW TO DECONTAMINATE THE MACHINE?

Press  key to switch the washer off.

The machine should be allowed to cool down for one hour.

Use the necessary personal protection (gloves, mask, safety glasses...).

Remove the Waste Water Flexible emptying hose from the standpipe and place it in a large containment sump (that can hold 14 liters (3.7 gallons)) with a top edge no more than 100 mm (4 inches) above the floor. This will siphon water from the basin into the containment sump.


Replace the Waste Water Flexible emptying hose into the standpipe.

Remove the 2 basin filters and use an external pump to remove the remainder of the water from the bottom of the chamber. Replace the 2 basin filters.

Remove the necessary side panel(s) in order to gain access to the components that need to be repaired or replaced.

Perform the repairs by replacing the parts in the same manner by which they were installed in the factory. Please note that all safety devices on this machine are factory preset and will not require any modification or calibration by maintenance personnel.

Replace the side panel(s) that were removed.

Press  key to switch the washer on.

Dispose of used parts that may have been exposed to toxic chemicals or contaminated by pathogenic materials according to local and company regulations. Please consult the Material Safety Data Sheet for specific information regarding the chemicals used in this machine.

## 5. PREVENTIVE MAINTENANCE

GETINGE LANCER'S TECHNICAL ASSISTANCE SERVICE recommends to all the users at least one annual preventive maintenance visit.

The preventive maintenance reduces the risks of stops of the washer due to breakdowns and enables enlarge the life duration of the equipments.

Depending on the countries where the washer is used and the local norms, a higher frequency of preventive maintenance visits can be necessary.

## 6. PREVENTATIVE MAINTENANCE SCHEDULE

FUNCTION	Daily	Biannual	1 Year	2 Year	5 Year
CLEAN FILTER SYSTEM IN CHAMBER.	X	X	X	X	X
CHECK CHEMICAL CONTAINERS FOR ANY LEAKAGE.	X	X	X	X	X
ENSURE CHEMICAL HOSES ARE NOT PINCHED.	X	X	X	X	X
CLEAN EXTERIOR PANELS.	X	X	X	X	X
INSPECT WATER SUPPLY HOSES FOR CRACKS, BULGES, AND LEAKS.		X	X	X	X
ENSURE THE WATER HOSE SEALS AND FILTERS ARE CLEAN AND HAVE NO CRACKS.		X	X	X	X
CHECK CHEMICAL SUPPLY HOSES FOR CRACKS, BULGES AND LEAKS.		X	X	X	X
INSPECT INTERNAL TUBING ON CHEMICAL PUMPS FOR WEAR. (IF APPLICABLE)		X	X	X	X
CHECK CHEMICAL LEVEL SENSORS FOR CORRECT OPERATION. (IF APPLICABLE)		X	X	X	X
ENSURE ALL PANELS ARE PROPERLY SECURED.		X	X	X	X
CHECK ALL INTERNAL HOSES FOR CRACKS, BULGES AND LEAKS.		X	X	X	X
ENSURE ALL HOSE CLAMPS ARE PROPERLY TIGHTENED.		X	X	X	X
CHECK ALL COLUMN SEALS FOR LEAKS AND CRACKS.		X	X	X	X
CHECK SPRAY ARM SUPPORT SEALS FOR LEAKS AND CRACKS.		X	X	X	X
CHECK SPRAY ARMS AND BUSHINGS FOR WEAR.		X	X	X	X
CHECK DOOR SEAL AND GASKET FOR LEAKAGE.		X	X	X	X
INSPECT THE DOOR SPRINGS, DOOR WHEELS AND THEIR SLING, HOOKS, DOOR SWITCH FOR PROPER OPERATION.		X	X	X	X
CHECK RECYCLING AND EMPTYING PUMP SEALS FOR LEAKAGE AND QUIET OPERATION.			X	X	X
CHECK FOR LOSE ELECTRICAL CONNECTIONS AT COMPONENTS AND ELECTRONIC CARDS.			X	X	X
VERIFY THE CORRECT OPERATION OF ALL RELAYS AND THEIR ASSOCIATED COMPONENTS.			X	X	X
CHANGE THE HEATING RELAY.					X

(1) Daily maintenance must be handled by users staff.

(2) Others maintenances (bi-annual, 1 year, 2 years & 5 years) must be carry out by the GETINGE LANCER's technical assistance service.

**7. RECOMMENDED SPARE PARTS 810 LX – 815 LX**

Description	New Part #	Quantity/ Machine
Door Spring	12010003	2
Door wheels	46020064	2
Door sling	46040004	2
Emptying Pump 50 hz	23010047	1
Emptying Pump 60hz	23010070	
Pressurestat	28020066	1
Autoclude™ Internal tubing	23080014	2
Main Pump50hz	23010076	1
Main Pump60hz	23010074	
capacitor	23080098	1
Door Seal	14050003	3
Bottom Door Seal	04120002	1
Column Seal	14030041	2
Threaded Connection	33080026	2
Water Inlet Filter/Seal	17010025	2
Spray Arm Washer	31040012	2
Heating Relay	20030007	1

**8. DISPOSAL OF WASHER**

At the end of life of the washer, the users' attention is drawn to the requirement not to dispose of waste electrical and electronic equipment (WEEE) as unsorted municipal waste and to collect such WEEE separately.



---

## CHAPTER 6 PROBLEMS

---

In this chapter you will get all the problems that you might get on your washer.



In a general way and whatever the noted anomaly, it is appropriate to stop the machine, to disconnect the power supply cable and to turn off the taps of water arrivals.

## 1. INCIDENTS

### 1.1 THE DETERGENT OR NEUTRALIZING AGENT DOES NOT ENTER THE WASHER

- The tube is blocked.
- The tank is empty.
- The pump hose is pinched.

### 1.2 THE WASHER DOES NOT FUNCTION

- It is not connected to the power supply.
- There is mains power.
- The circuit-breaker protecting the electrical control circuit has been tripped.  
CONSULT THE TECHNICAL DEPARTMENT.

### 1.3 ABNORMAL NOISE

- One of the washing arms is touching one or more of the items to be washed.
- Check the loading of the washer.




EVERY MAINTENANCE AND TECHNICAL INSTALLATION INTERVENTION MUST BE DONE BY A TECHNICIEN ENTITLED TO WORK UNDER TENSION.

## 2. WARNINGS

### 2.1 LACK OF PRODUCTS

*\*only for washer with level float*

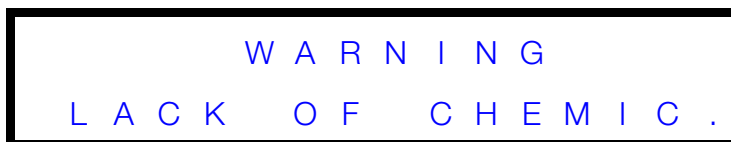

INCIDENT: The following message is displayed if lack of chemical at start of cycle when you press the **START** key.

ACTION: Check level of additive tanks, replace additive low level tank.

### 2.2 HOT CHAMBER



INCIDENT: the following message is displayed if the temperature inside the washing chamber is above the safety temperature set point for door opening.

ACTION: At the end of the cycle, let the washer chamber and contents cool before opening the chamber door.

### 2.3 FULL BASIN



INCIDENT: If the wash chamber contains water at the beginning of the cycle, either from the interruption of the previous cycle or due to an abnormal addition of water to the chamber.

ACTION: The washer is automatically emptied and the cycle then proceeds normally.

## 2.4 MAINTENANCE REMINDER



INCIDENT: After turning on the machine, the reminder of the upcoming preventative maintenance is shown on the display.

ACTION: Press the **START** key to acknowledge the reminder. Schedule a preventative maintenance service call.

## 2.5 PREVENTATIVE MAINTENANCE REQUIRED




INCIDENT: After starting the wash cycle, the preventative maintenance message is shown on the display.

ACTION: Press the **START** key to acknowledge the reminder. Preventative maintenance should be performed on the machine.



### 3. FAULT ALARMS

These alarms stop the operation of the washer. To clear the alarm mode, the washer must be switched off by pressing  button.

#### 3.1 FAULT N°1 PROBE FAULT.



Probe Fault Definition :

The probe used to check the temperature of the water in the chamber is disconnected or defective.

Corrective Action :

CONTACT A MAINTENANCE TECHNICIAN to check the electrical connection and the condition of the probe.

#### 3.2 FAULT N°2 EMPTYING FAULT.



Emptying Fault Definition :

The washer has not been fully emptied at the end of the normal emptying time defined in the Common Times menu.

Corrective Action :

Check that there is no restriction on the emptying line, that the emptying pump (or the valve) and its pipes are not blocked and that the chamber filters are not clogged.

This message may be displayed at the end of PREWASH 1, PREWASH 2, WASH, RUNNING WATER RINSE 1, ACID RINSE, RUNNING WATER RINSE 2, COLD DEMI. WATER RINSE and HOT DEMI. WATER RINSE.

### 3.3 FAULT N°3 HEATING EXCESS.

F A U L T      n ° 0 3  
H E A T I N G   E X C E S S

Heating Excess Definition :

This message is displayed if the basin temperature exceeds the programmed temperature by 20°C.

Corrective Action :

Verify that the incoming water temperature does not exceed the programmed setpoint temperature.

CONTACT A MAINTENANCE TECHNICIAN.

### 3.4 FAULT N°4 HEATING FAULT.

F A U L T      n ° 0 4  
H E A T I N G   F A U L T

Heating Fault Definition :

This message is displayed during one of the heating phases:

- if after 8 minutes the water temperature has not increased by 8°C
- if, for washers 120V mono / 60Hz, after 16 minutes the water temperature has not increased by 8°C

Corrective Action :

CONTACT A MAINTENANCE TECHNICIAN TO CHECK :

- the electrical connections,
- the condition of heating elements,
- the safety thermal cut-out with manual reset.

This message may be displayed during the heating phase of PREWASH 1, PREWASH 2, WASH, and HOT DEMI. WATER RINSE.

### 3.5 FAULT N°5 NO WATER.

F A U L T      n ° 0 5  
N O   W A T E R

No Water Definition :

The washer did not reach the required water level by the end of the normal filling time defined in the Common Times menu.

Corrective Action :

Check that the water inlet valves are open, that the water inlet pipes are in good condition and that the water inlet filters are clean.

This message may be displayed during filling for PREWASH 1, PREWASH 2, PREWASH 3, WASH , RUNNING WATER RINSE 1, ACID RINSE, RUNNING WATER RINSE 2, COLD DEMI. WATER RINSES and HOT DEMI. WATER RINSE.

### 3.6 FAULT N°6 DOOR FAULT

F A U L T      N ° 0 6  
O P E N E D    D O O R

Door Fault Definition :

This message is displayed when the door is opened during the cycle. The cycle is stopped.

Corrective Action :

Shut the door and start the cycle again.

### 3.7 FAULT N°7 LEVEL FAULT.

F A U L T      N ° : 0 7  
F I X   T O   L E V E L

Fix to Level Definition :

After achieving the proper water level during the Filling Time, the water level has dropped causing the pressurestat to open times to indicate fluctuation of the water level in the machine.

Corrective Action :

Check if you have a leak or if the emptying tube is out of location.

**Getinge Lancer**

30 Boulevard de l'Industrie  
FR-31170 Tournefeuille  
France  
Phone: +33-561151111  
Fax: +33-561151616  
[www.lancer.fr](http://www.lancer.fr)

**Lancer UK Ltd**

1 Pembroke Avenue, Waterbeach  
Cambridge, CB5 9QR  
United Kingdom  
+44-1223861665  
+44-1223861990  
[www.lancer.co.uk](http://www.lancer.co.uk)

**Lancer USA Inc**

1150 Emma Oaks Tri - Ste 140  
Lake Mary, FL 32746-7120  
United States  
Phone: +1-4073278488  
Fax: +1-4073271229  
[www.lancer.com](http://www.lancer.com)

**LANCER**  
GETINGE GROUP

[www.getinge.com](http://www.getinge.com)

**GETINGE GROUP** is a leading global provider of equipment and systems that contribute to quality enhancement and cost efficiency within healthcare and life sciences. We operate under the three brands of ArjoHuntleigh, GETINGE and MAQUET. **ArjoHuntleigh** focuses on patient handling and hygiene, disinfection, DVT prevention, medical beds, therapeutic surfaces and diagnostics. **GETINGE** provides solutions for infection control and prevention within healthcare and life sciences. **MAQUET** specializes in therapeutic applications, products, solutions and services for OR and ICU.