(+48) 32 453 91 70
info@pol-eko.com.pl
www.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k.
44-300 Wodzisław Śląski
ul. Kokoszycka 172 C

Data sheet

print date: 2026-07-20

Laboratory Freezer

ZLN-T 125 Smart

The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Advantages of the SMART controller:
- 4,3”, clear, full colour touch screen
- LAN, USB ports for data transfer
- multi-segment time and temperature programs
- visual and sound alarm
- internal memory for programs and data storage
- event registry
- user manual for direct download
- Quick change of program parameters
- Alarm Bar
- operating with gloves on

Smart - preview screen

(+48) 32 453 91 70
info@pol-eko.com.pl
www.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k.
44-300 Wodzisław Śląski
ul. Kokoszycka 172 C

TECHNICAL DATA	
air convection	natural
chamber capacity [l]	138
working capacity [l]	127
controller	microprocessor PID
display	4,3" full colour touch screen
insulation type	polyurethane foam
TEMPERATURE	
temperature range [°C]	-40...0
temperature resolution every ... [°C]	0,1
temperature fluctuation at -20°C [+/-°C]*	0,5
temperature variation at -20°C [+/-°C]*	2
temperature protection	class 3.2 to DIN 12880 (option)
CHAMBER	
door type	solid
interior	
C Smart	stainless steel to DIN 1.4016
CS Smart	stainless steel to DIN 1.4016
P Smart	corrosion-resistant stainless steel to DIN 1.4301
PS Smart	corrosion-resistant stainless steel to DIN 1.4301
housing	
C Smart	powder coated sheet
CS Smart	stainless steel polished
P Smart	powder coated sheet
PS Smart	stainless steel polished

overall dims [mm] /1/	
width A	720
height B	1220
depth C	810
internal dims [mm]	
width D	390
width D'	420
height E	600
depth F	530
depth F'	550

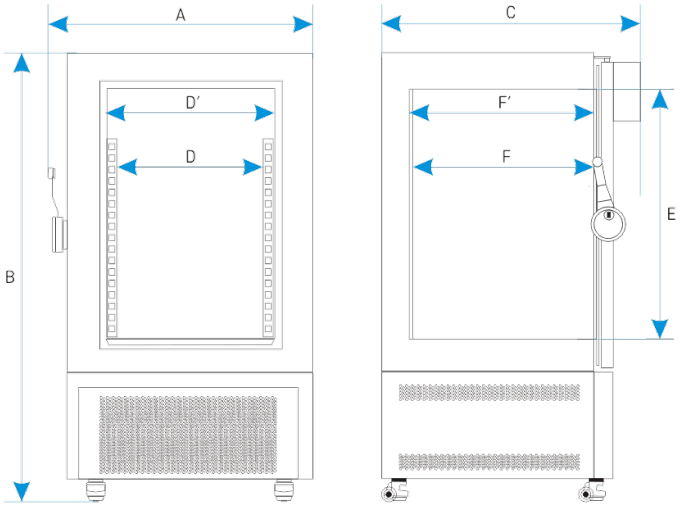

shelves (standard | max)	2 | 3
max shelf workload [kg] /2/	10
- reinforced shelf version (PW) [kg] /3/	50
max unit workload [kg]	50
- reinforced unit version (W) [kg] /4/	100
weight [kg]	105

(+48) 32 453 91 70
info@pol-eko.com.pl
www.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k.
44-300 Wodzisław Śląski
ul. Kokoszycka 172 C

ELECTRICAL PARAMETERS	
voltage	230V 50/60Hz
nominal power [W]	450
refrigerant	R290 / GWP=3
warranty	24 months
manufacturer	POL-EKO®

all the above technical data refer to standard units (without optional accessories)
* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:
K= +/- (T average max. - T average min.) / 2
** - other power supplies on request
1 - depth doesn't include 50 mm of power cable
2 - on uniformly loaded surface
3 - reinforced shelf
4 - reinforced version

OPTIONS AND ACCESSORIES

	Order number: */PP	Perforated shelf
	Order number: */PO	Full shelf with hole
	Order number: */PW	Reinforced shelf
	Order number: KUW GN*/*	Stainless steel cuvettes
	Order number: */W	Reinforced version
	Order number: OWW/OWW LED	Interior lighting
	Order number: LabDesk	LabDesk software
	Order number: BRT/*/L or IQ/OQ/PQ	Calibration and IQ, OQ, PQ qualification
	Order number: */3.2	Over temperature protection 3.2 class according to DIN 12880
	Order number: BPP 12	Battery backup for display

(+48) 32 453 91 70
info@pol-eko.com.pl
www.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k.
44-300 Wodzisław Śląski
ul. Kokoszycka 172 C

Order number: PORT ALARM Dry alarm contact