



POL-EKO®

(+48) 32 453 91 70  
info@pol-eko.com.pl  
www.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k.  
44-300 Wodzisław Śląski  
ul. Kokoszycka 172 C

## Data sheet

print date: 2026-09-07

## Pharmaceutical Refrigerator CHS-C 1200 A



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

### Standard features of the CHS-C

- glass door
- temperature range from 0°C to +10°C
- lockable chamber
- easy-to-use microprocessor-based temperature controller
- external (LED) display showing the temperature inside the chamber
- opening for an external sensor (Ø30 mm) in the left-hand wall of the unit
- alarm for when the set temperature is exceeded
- forced air circulation ensuring an even temperature distribution within the chamber
- wire shelves ensuring free air flow





POL-EKO®

(+48) 32 453 91 70  
info@pol-eko.com.pl  
www.pol-eko.com.pl

POL-EKO A. Polok-Kowalska sp.k.  
44-300 Wodzisław Śląski  
ul. Kokoszycka 172 C

## TECHNICAL DATA

|                      |                                          |
|----------------------|------------------------------------------|
| air convection       | forced                                   |
| chamber capacity [l] | 1397                                     |
| working capacity [l] | 1335                                     |
| controller           | microprocessor with external LED display |
| display              | LED                                      |

## TEMPERATURE

|                                        |                        |
|----------------------------------------|------------------------|
| temperature range [°C]                 | 0...+10                |
| temperature resolution every ... [°C]  | 0,1                    |
| temperature fluctuation at 4°C [±/°C]* | 1                      |
| temperature variation at 4°C [±/°C]*   | 2                      |
| temperature protection                 | class 1.0 to DIN 12880 |

## CHAMBER


|           |                               |
|-----------|-------------------------------|
| door type | glass                         |
| interior  | stainless steel to DIN 1.4016 |
| housing   | powder coated sheet           |

### overall dims [mm] /1/

|          |      |
|----------|------|
| width A  | 1470 |
| height B | 1990 |
| depth C  | 940  |

### internal dims [mm]

|          |         |
|----------|---------|
| width D  | 2 x 540 |
| width D' | 1330    |
| height E | 1510    |
| depth F  | 680     |
| height I | 1340    |

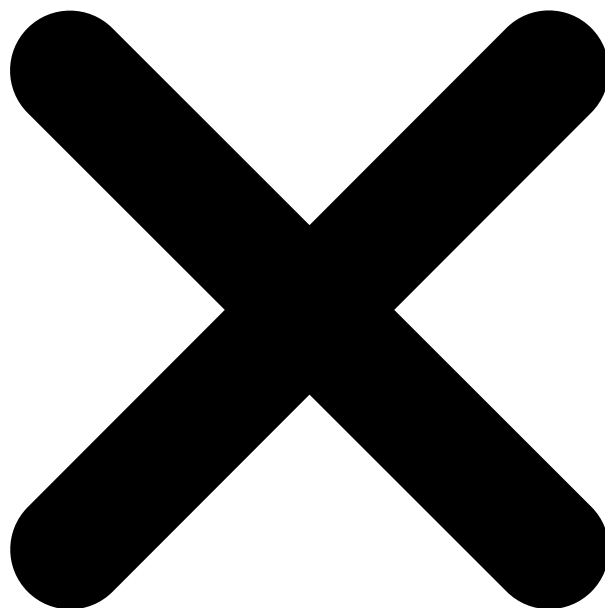

|                                          |            |
|------------------------------------------|------------|
| shelves (standard   max)                 | 2 x 3   11 |
| max shelf workload [kg] /2/              | 30         |
| - reinforced shelf version (PW) [kg] /3/ | 100        |
| max unit workload [kg]                   | 300        |
| weight [kg]                              | 221        |



Bank: ING BŚ o/Wodzisław Śląski | Nr rachunku: 90 1050 1403 1000 0022 0879 5498  
NIP: 647-216-26-87 | REGON: 276111984 | KRS: 0000083696 | Nr rej. w BDO 000005609



POL-EKO®

(+48) 32 453 91 70  
info@pol-eko.com.pl  
www.pol-eko.com.pl

POL-EKO A. Polok-Kowalska sp.k.  
44-300 Wodzisław Śląski  
ul. Kokoszycka 172 C

## ELECTRICAL PARAMETERS

|                   |              |
|-------------------|--------------|
| voltage           | 230V 50/60Hz |
| nominal power [W] | 550          |
| refrigerant       | R290 / GWP=3 |
| warranty          | 24 months    |
| manufacturer      | POL-EKO®     |

all the above technical data refer to standard units (without optional accessories)

\* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:

$K = \pm (T \text{ average max.} - T \text{ average min.}) / 2$

\*\* - other power supplies on request


1 - depth doesn't include 50 mm of power cable, the width does not include the 20 mm of rubber plug

## OPTIONS AND ACCESSORIES



Order number: \*/P INOX

Stainless steel wire shelf INOX



Order number: ST/CHL/SWP ALU

Aluminum drawer with powder coated slides




Order number: ST/CHL/SWP INOX

Stainless steel drawer with stainless steel slides



Order number: QLK\*

Castors



Order number: BRT/\*/L or IQ/OQ/PQ

Calibration and IQ, OQ, PQ qualification